



TEI ROCK DRILLS



HCC10X


CASING HANDLER

The HCC10X is designed to help contractors work quickly, safely, and efficiently on the jobsite. The unique claws help the operator to clamp onto various sized pipe without racks, or the safety hazard of having a helper in the work zone.

A true attachment, the HCC10X does not modify the excavator in any way. It uses auxiliary hydraulics of the excavator. The HCC10X picks up casing and drill pipe simultaneously, keeping them concentric. With two 360-degree positioners allow the operator to work in both vertical and horizontal planes. A programmed controller is used for smooth operation under loads.



CASING AND TOOLING HANDLER

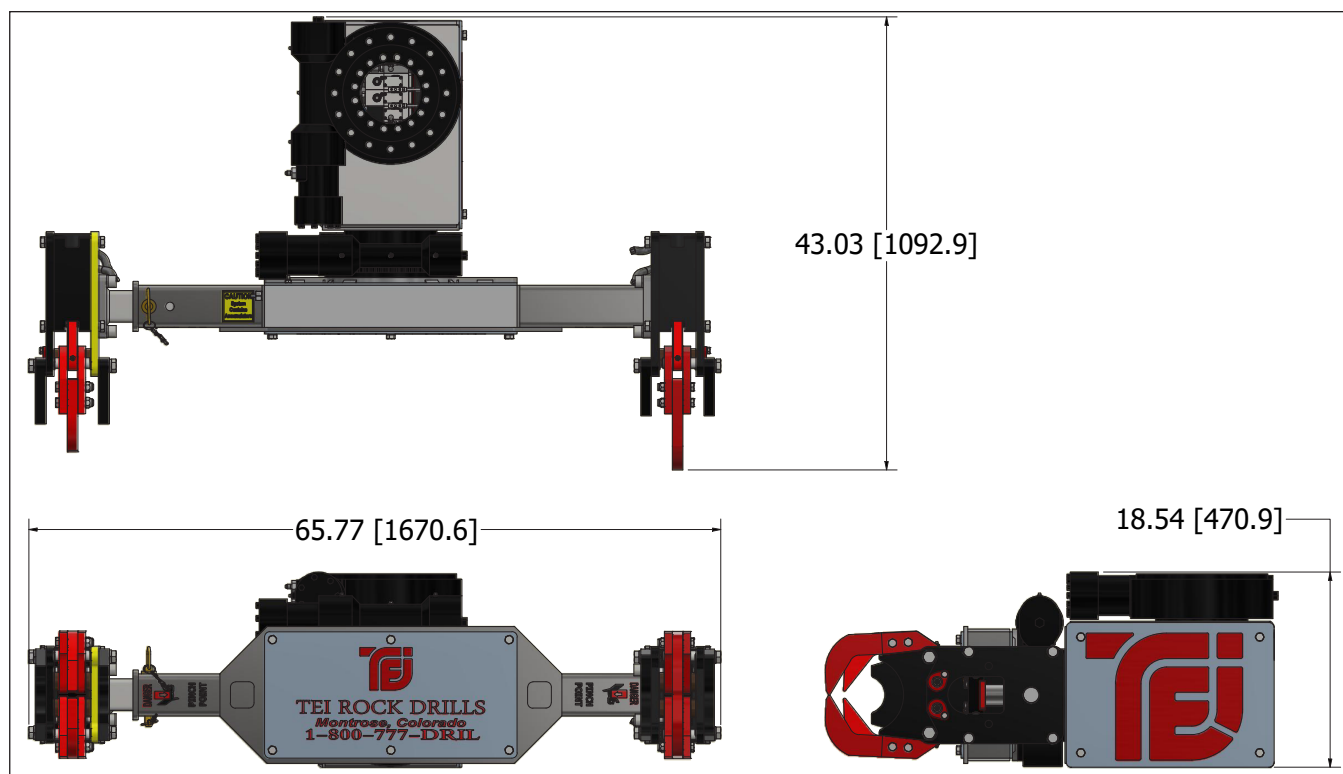

ROTATION SPECIFICATIONS

	U.S.	Metric
TOOLING DIAMETER	1 - 10 inches	25 - 254 mm
MAXIMUM TOOL WEIGHT	1000 lb	454 kg
HYDRAULIC FLOW	5 - 8 gpm	19 - 30 lpm
HYDRAULIC PRESSURE	3000 psi	207 bar
ELECTRICAL	Specify 12V 24V	Specify 12V 24V
WEIGHT	1400 lb	635 kg
EXCAVATOR WEIGHT CLASS	8 - 15 tons	7 - 15 tonnes



800.777.3745 | 970.249.1515 | WWW.TEIROCKDRILLS.COM

Specifications subject to change without notice.
TEI technical specifications consider a 40% hydraulic power loss.



QUALITY POLICY
CONTINUAL IMPROVEMENT OF CUSTOMER VALUE THROUGH
INNOVATION, EFFICIENCY AND INTEGRITY

TEI08.040.B
REV 02/02/2021