




TEI ROCK DRILLS

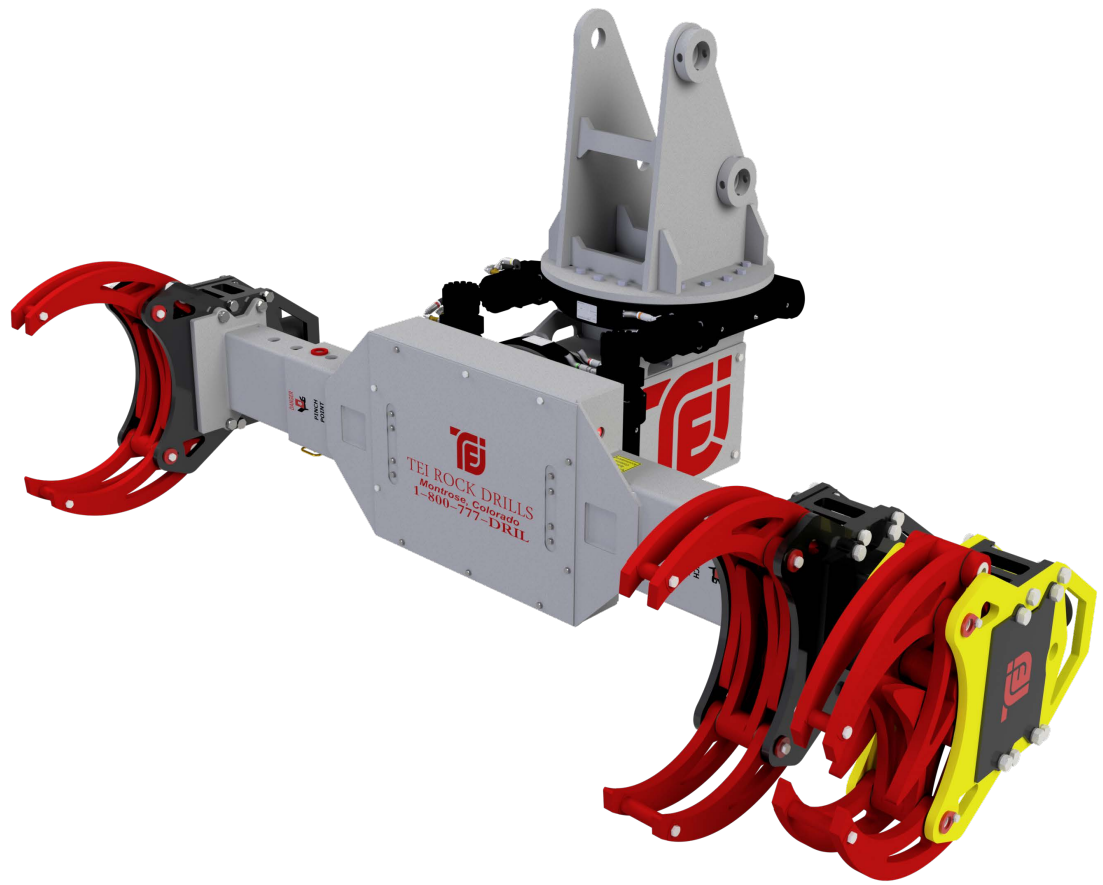

HCC20X


CASING HANDLER

The HCC20X is designed to help contractors work quickly, safely, and efficiently on the jobsite. The unique claws help the operator to clamp onto various sized pipe without racks, or the safety hazard of having a helper in the work zone.

A true attachment, the HCC20X does not modify the excavator in any way. It uses auxiliary hydraulics of the excavator. The HCC20X picks up casing and drill pipe simultaneously, keeping them concentric. With two 360-degree positioners allow the operator to work in both vertical and horizontal planes. A programmed controller is used for smooth operation under loads.



CASING AND TOOLING HANDLER

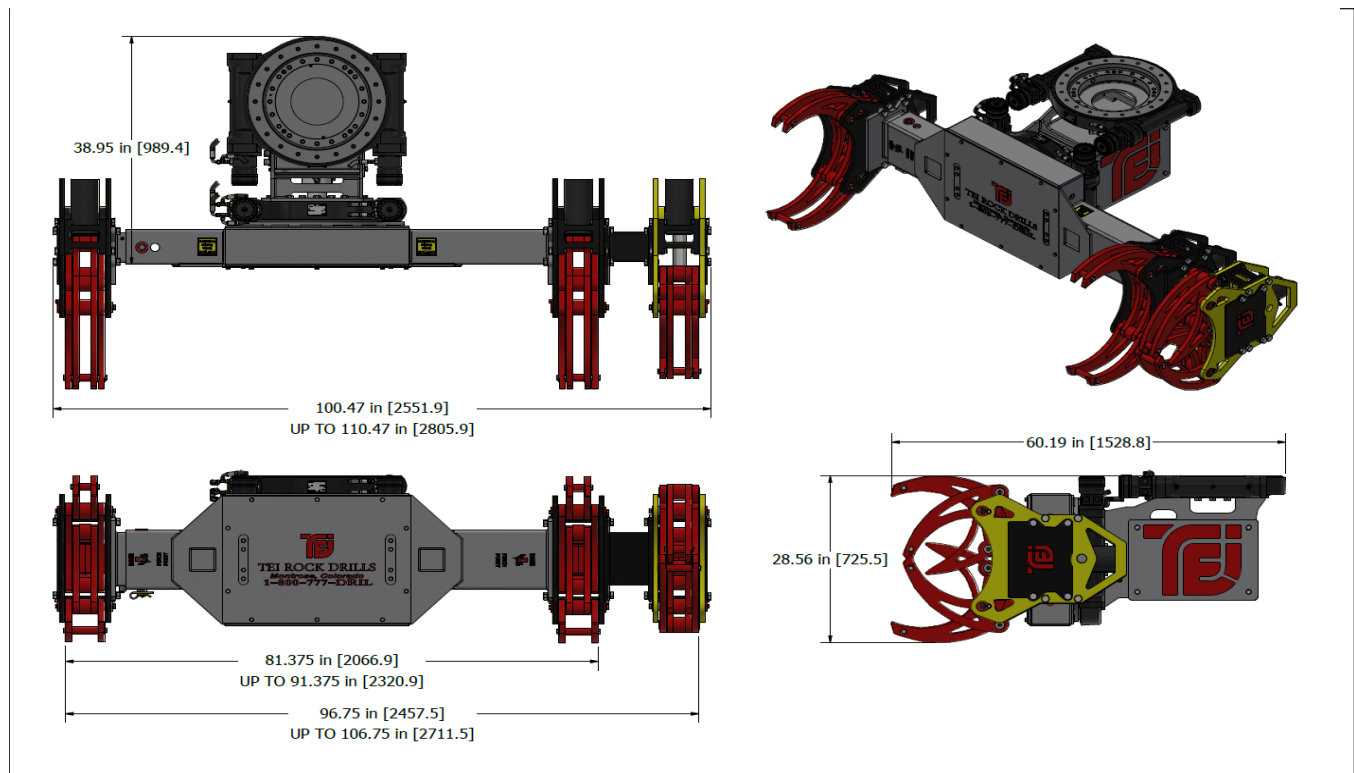

SPECIFICATIONS

	U.S.	Metric
CASING DIAMETER	4 - 14 inches	102 - 356 mm
MAXIMUM TOOL WEIGHT	2000 lb	907 kg
HYDRAULIC FLOW	5 - 8 gpm	19 - 30 lpm
HYDRAULIC PRESSURE	3000 psi	207 bar
ELECTRICAL	Specify 12V 24V	Specify 12V 24V
WEIGHT	2800 lb	1270 kg
EXCAVATOR WEIGHT CLASS	15 - 20 tons	14 - 18 tonnes



800.777.3745 | 970.249.1515 | WWW.TEIROCKDRILLS.COM

Specifications subject to change without notice.
TEI technical specifications consider a 40% hydraulic power loss.



QUALITY POLICY
CONTINUAL IMPROVEMENT OF CUSTOMER VALUE THROUGH
INNOVATION, EFFICIENCY AND INTEGRITY

TEI08.037
REV 06/08/2022