


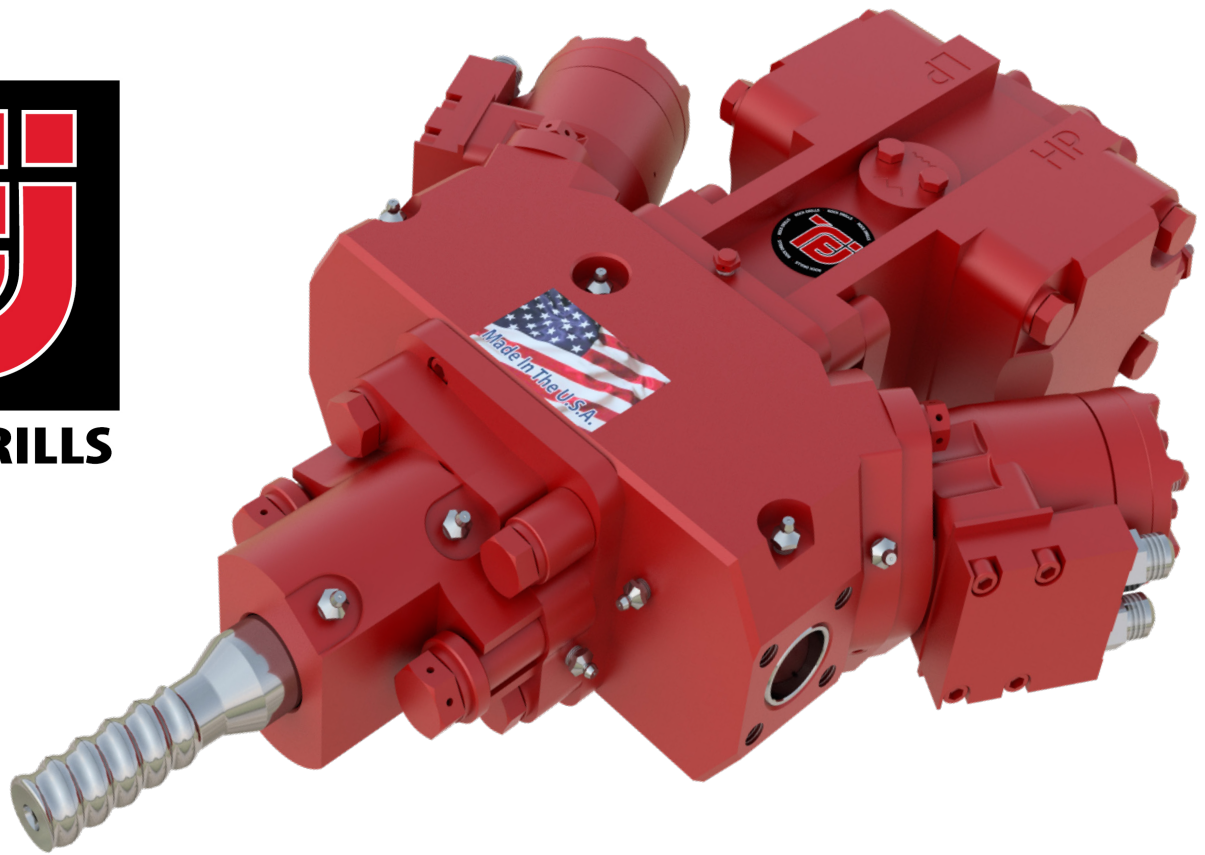

TE260HT


HYDRAULIC DRIFTER

The TE260HT incorporates our patented Automatic Stroke Adjustment (ASA) technology as part of the percussion system. The high frequency and smooth operation of the ASA system prolongs the drifters life, which increases productivity and profit.

Two power stroke settings allow precise control over the energy and frequency of the percussion system. Reversible rotation motors allow for effective drilling and minimize the risk of jamming. The low profile helps to drill next to walls and to reach into tight spaces. With its compact size, the high power-to-weight ratio makes TEI drills unlike any other drills on the market.



ANCHORING & MICROPILES

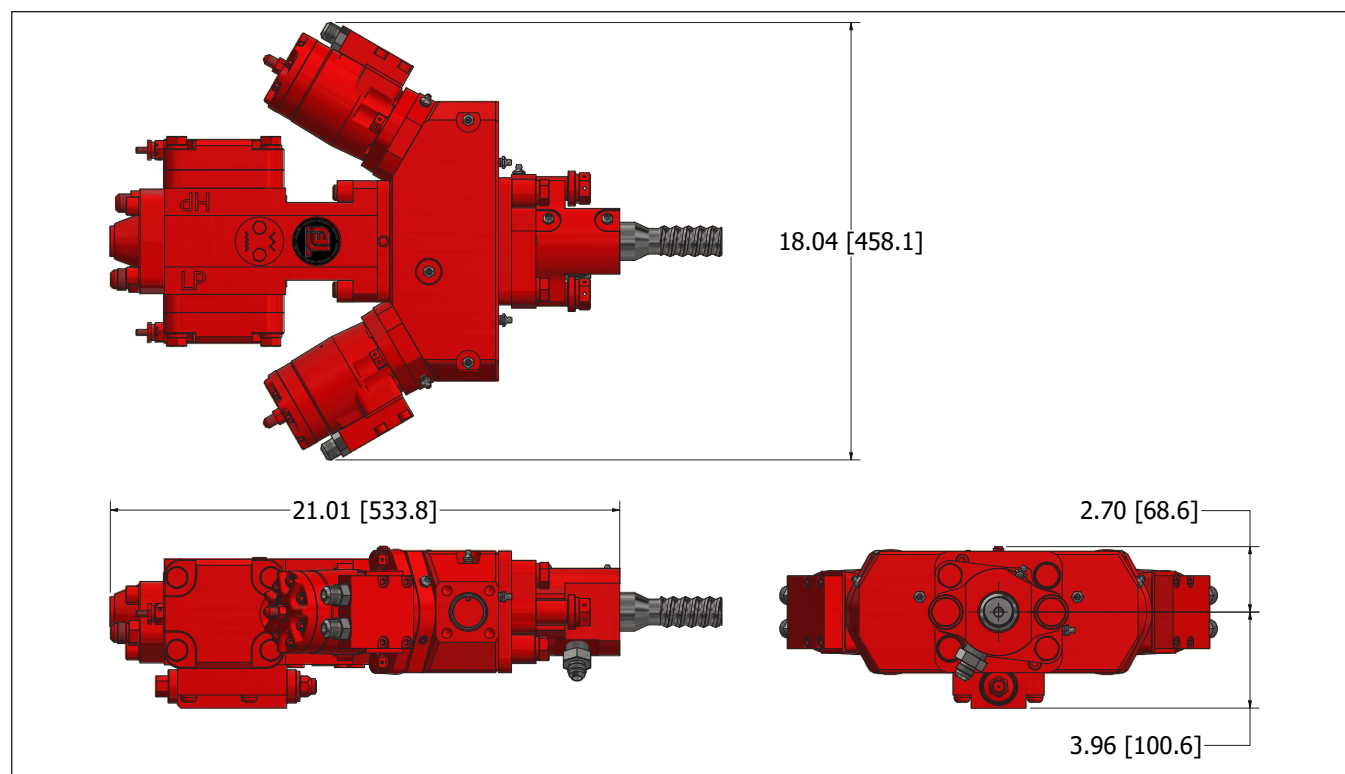

ROTATION SPECIFICATIONS

	U.S.	Metric
ROTATION TORQUE	1000 lbf-ft	1357 Nm
ROTATION FLOW	10 - 20 gpm	38 - 76 lpm
ROTATION PRESSURE	2250 psi	155 bar
WEIGHT	180 lb	82 kg
SPEED	200 rpm	

HAMMER SPECIFICATIONS

	U.S.	Metric
OUTPUT POWER	13 hp	10 kW
HAMMER FLOW	18 gpm	68 lpm
HAMMER PRESSURE	2250 psi	155 bar
HAMMER FREQUENCY	4200 bpm	70 Hz

FLUSHING SPECIFICATIONS

	U.S.	Metric
WATER PRESSURE	150 psi	10 bar
WATER FLOW	7 gpm	25 lpm
AIR PRESSURE	110 psi	8 bar
AIR FLOW	179 cfm	5 m3 - mn

SHANKS AVAILABLE

R25, Rope 1.0, Rope 1.25, Rope 1.50, T38, W32, W38, T30, T40



800.777.3745 | 970.249.1515 | WWW.TEIROCKDRILLS.COM

Specifications subject to change without notice.
TEI technical specifications consider a 40% hydraulic power loss.



QUALITY POLICY
CONTINUAL IMPROVEMENT OF CUSTOMER VALUE THROUGH
INNOVATION, EFFICIENCY AND INTEGRITY

TEI08.018.B
REV 02/02/2021