


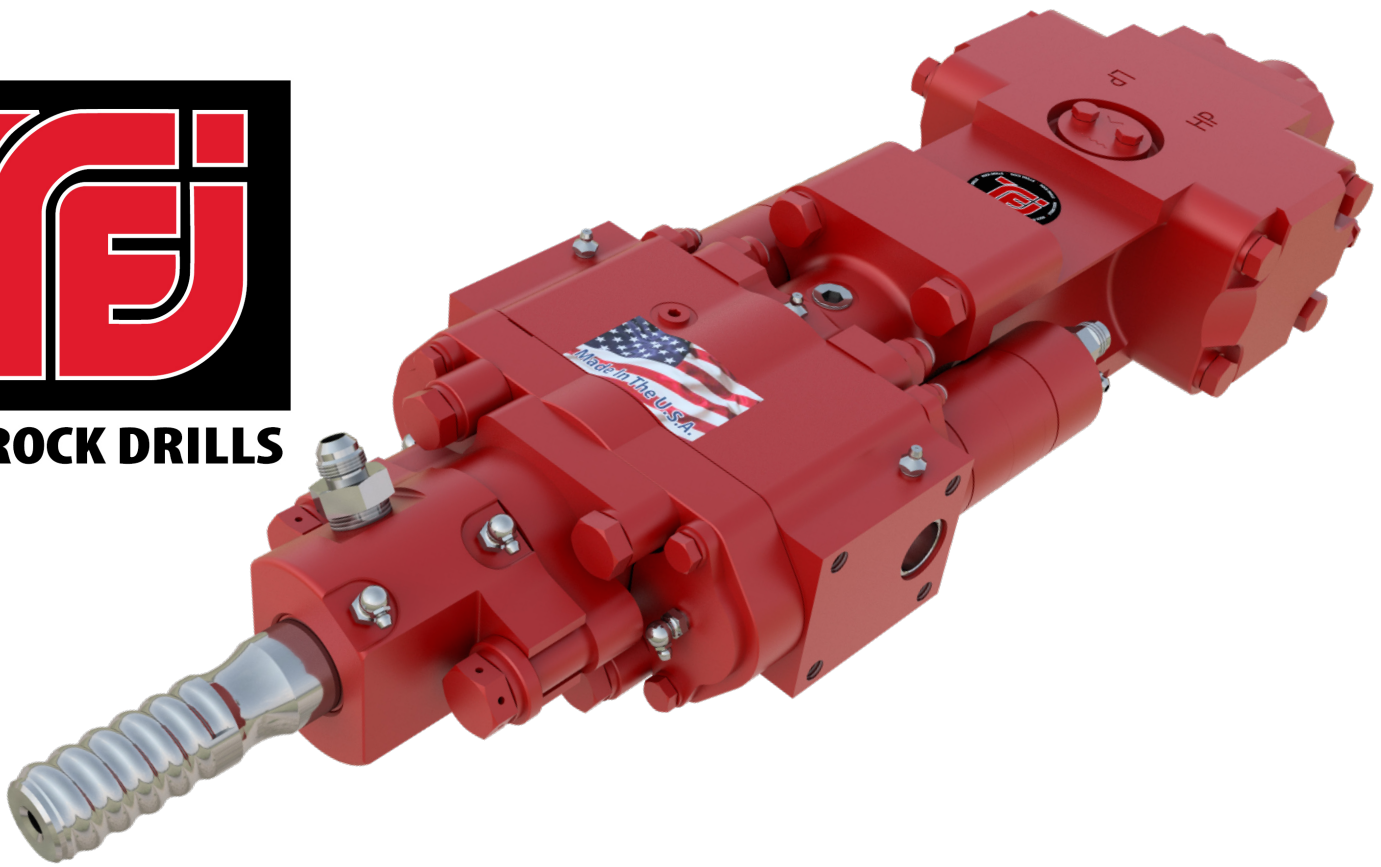


TE326


HYDRAULIC DRIFTER

The TE326 incorporates our patented Automatic Stroke Adjustment (ASA) technology as part of the percussion system. The high frequency and smooth operation of the ASA system prolongs the drifters life, which increases productivity and profit.

Two power stroke settings allow precise control over the energy and frequency of the percussion system. Reversible rotation motors allow for effective drilling and minimize the risk of jamming. The low profile helps to drill next to walls and to reach into tight spaces. With its compact size, the high power-to-weight ratio makes TEI drills unlike any other drills on the market.

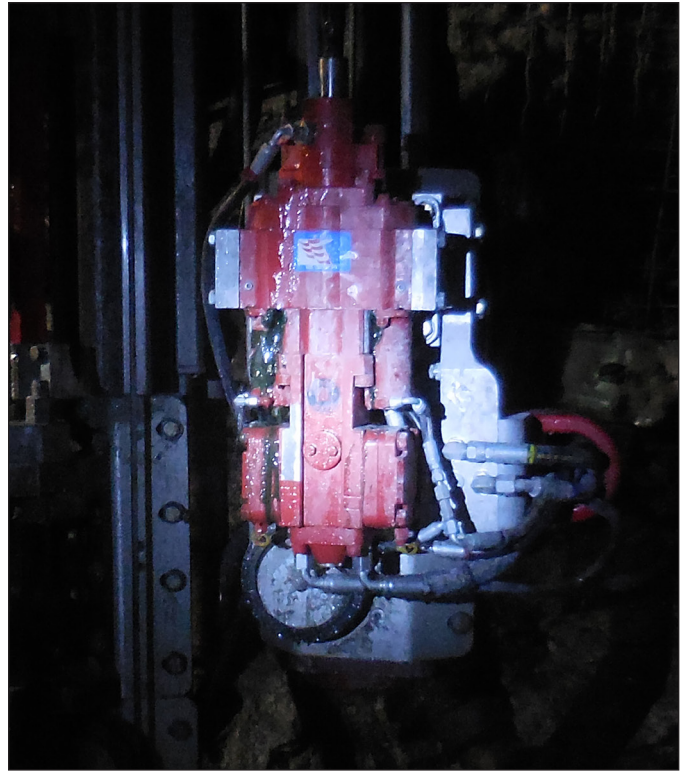

HARD ROCK MINING

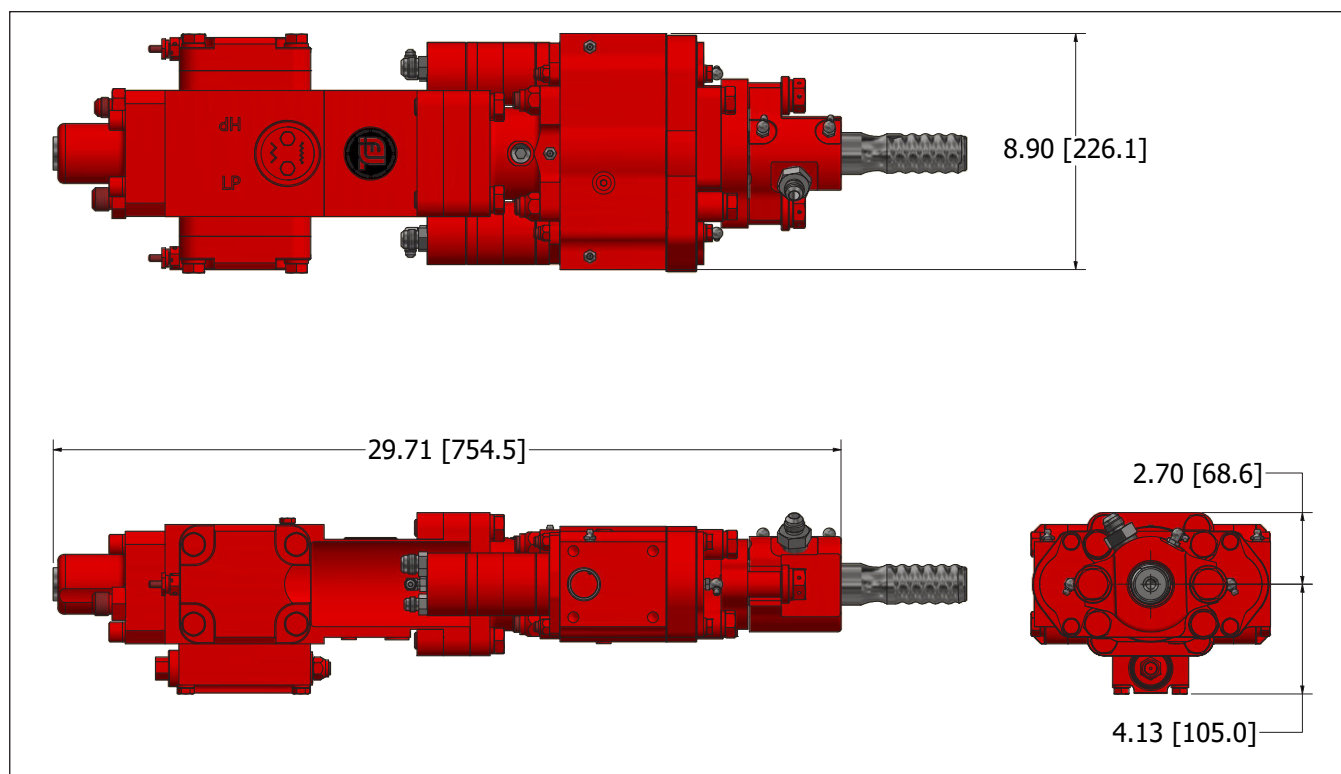

ROTATION SPECIFICATIONS

	U.S.	Metric
ROTATION TORQUE	250 lbf-ft	339 Nm
ROTATION FLOW	5 - 13 gpm	49 lpm
ROTATION PRESSURE	2250 psi	155 bar
WEIGHT	178 lb	81 kg
SPEED	250 rpm	

FLUSHING SPECIFICATIONS

	U.S.	Metric
WATER PRESSURE	150 psi	10 bar
WATER FLOW	7 gpm	25 lpm
AIR PRESSURE	110 psi	8 bar
AIR FLOW	179 cfm	5 m3 - mn

HAMMER SPECIFICATIONS

	U.S.	Metric
OUTPUT POWER	15 hp	11 kW
HAMMER FLOW	19 gpm	72 lpm
HAMMER PRESSURE	2250 psi	155 bar
HAMMER FREQUENCY	3480 bpm	58 Hz

SHANKS AVAILABLE

R25M, R25F, R32, R38, T38



800.777.3745 | 970.249.1515 | WWW.TEIROCKDRILLS.COM

Specifications subject to change without notice.
TEI technical specifications consider a 40% hydraulic power loss.



QUALITY POLICY
CONTINUAL IMPROVEMENT OF CUSTOMER VALUE THROUGH
INNOVATION, EFFICIENCY AND INTEGRITY

TEI08.021.B
REV 02/03/2021